

Media change for CF/S/SCF/3000 or 6000

1. Turn the valves perpendicular in to bypass mode. See figure below.
2. Unscrew the Quick-Connects on the tank side of the bypass valve, leaving bypass valve connected to the plumbing. Unscrew and remove the head from the tank.

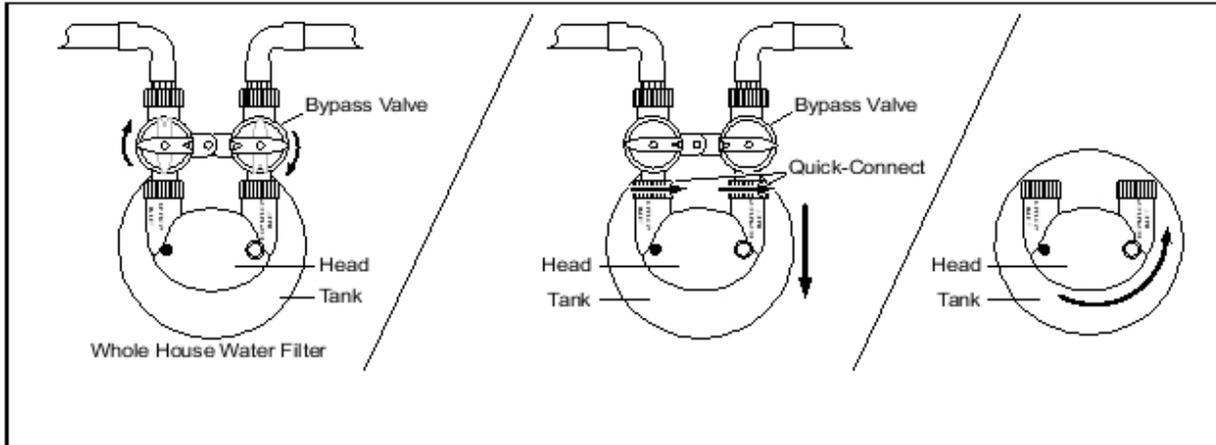


Figure 1

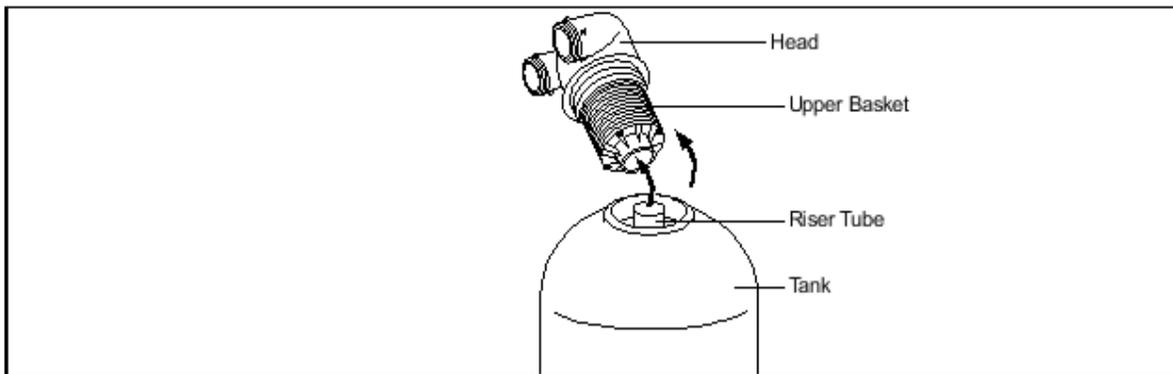


Figure 2

3. Pour the expired media from the tank. It may be necessary to use the water hose to wash the wet media from inside of the tank. Dispose of the expired media(s) with normal household debris.

*****Note:** If your tank has a removable riser tube, when removing the expired media from the tank, the riser tube will be flushed out of the tank along with the expired media. If this occurs, pull the tube all the way out and set it aside until the expired media is fully removed from the tank. If the tube does not come out during the above process, disregard this note and skip to step five. ***

4. Once the expired media is removed, replace the riser tube inside the tank with the attached lower basket on the bottom and the open tube facing up.

5. The riser tube will rest in the center of the bottom of the tank. Cover the top of the riser tube with a piece of tape to prevent the media from going inside. The pour the media into to the tank using the funnel provided.
6. Remove the tape from the riser tube and fit the riser tube into the bottom of the upper basket attached to the head.
7. Push the head back onto the tank and hand tighten.

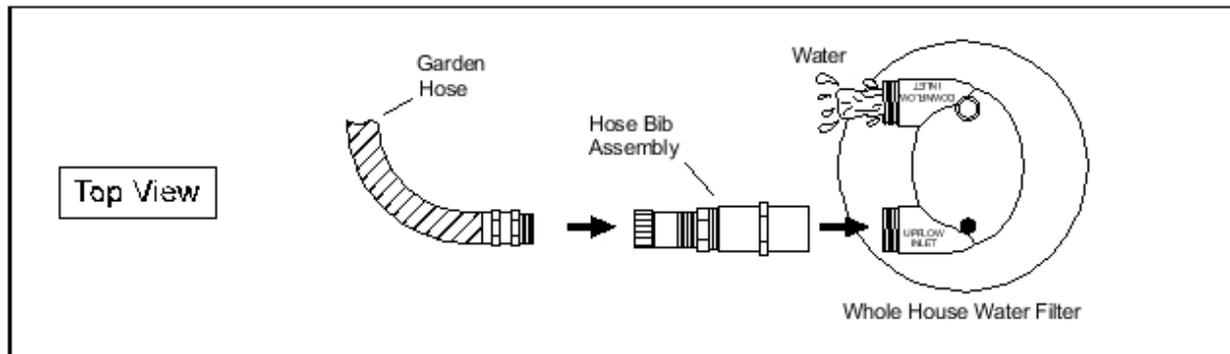


Figure 4

8. Use a hose bib assembly, can be purchased at your local hardware store, to connect your garden hose to the upflow, inlet side of the tank head.
9. Fill the tank with water until the water starts to flow out the down flow inlet. Turn the water off and let soak for 48 hours.
10. After the 48 hours soak time, turn on the garden hose 1/4 turn and rinse the tank for 15-30 minutes or until the water runs clear.
11. Turn off the hose water.
12. Use the hose bib assembly to connect your garden hose to the downflow (opposite) inlet side of the tank head.
13. Run the water through the downflow inlet side for 1 minute or until the water runs clear.
14. Turn off the water
15. Disconnect the garden hose from the tank and remove the hose bib assembly.

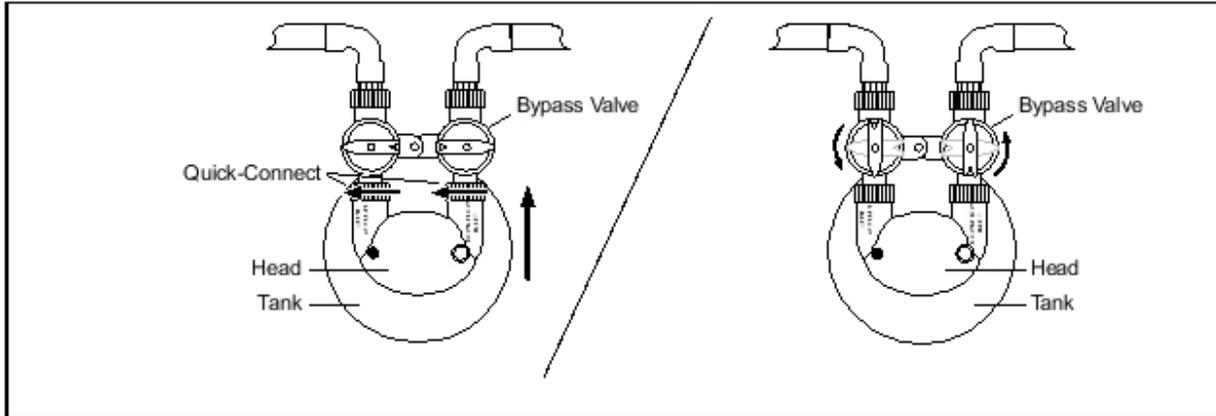


Figure 6

16. Install the tank head back onto the bypass valve hand tight all the way to the tabs. Turn the arrows on the bypass valve back to their original position(s).

Note: Avoid high flow rates (such as bathtubs or multi-head showers) for the first 72 hours to avoid flow restriction caused by carbon blockage of the basket inside the carbon tank.